

## GALAXY SELECT® SERIES


### AQUARIUS



| HORSEPOWER                               | 10  | 15                                     | 20                                     | 25                                     |
|--|---|--|--|--|
| HT x DIA ft UPPER                        | 55  | 65                                     | 70                                     | 80                                     |
| HT x DIA ft LOWER                        | 15 x 55   | 18 x 60                                | 20 x 70                                | 22 x 80                                |
| ELECTRICAL RATING<br>Ph   VOLTAGE   AMPS | 1   220-240   58A<br>3   220-240   34A<br>3   440-480   17A | 3   220-240   44A<br>3   440-480   22A | 3   220-240   54A<br>3   440-480   27A | 3   220-240   64A<br>3   440-480   32A |

60Hz

## GALAXY SELECT® SERIES DESIGN

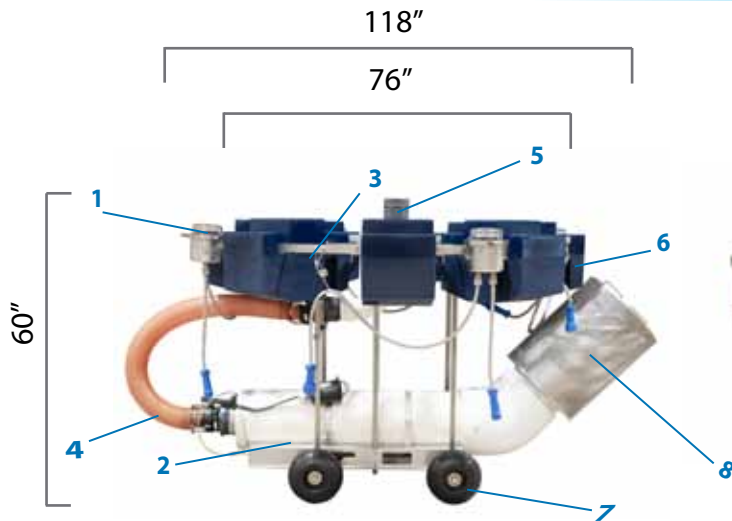



Galaxy Select® Series

- 1** - Tool Less Series 316 Stainless Steel Light Bracket
- 2** - Non-servicable, Oil Free, Water Cooled Motor with all Stainless Steel Pump Assembly
- 3** - 360° Available Tie Down Area
- 4** - Removable Discharge Tube and Intake Screen for Compact Storage

- 5** - Interchangeable Nozzles-Threaded and Tethered
- 6** - Removable Float Assembly for Easy Access to the Motor/Pump Assembly
- 7** - Easy Rolling Wheels with a Solid Axle
- 8** - Twist Locking Screen for Tool Less Removal for Cleaning with Double Handles

Minimum Operating Depth 62"

## INSTALLATION

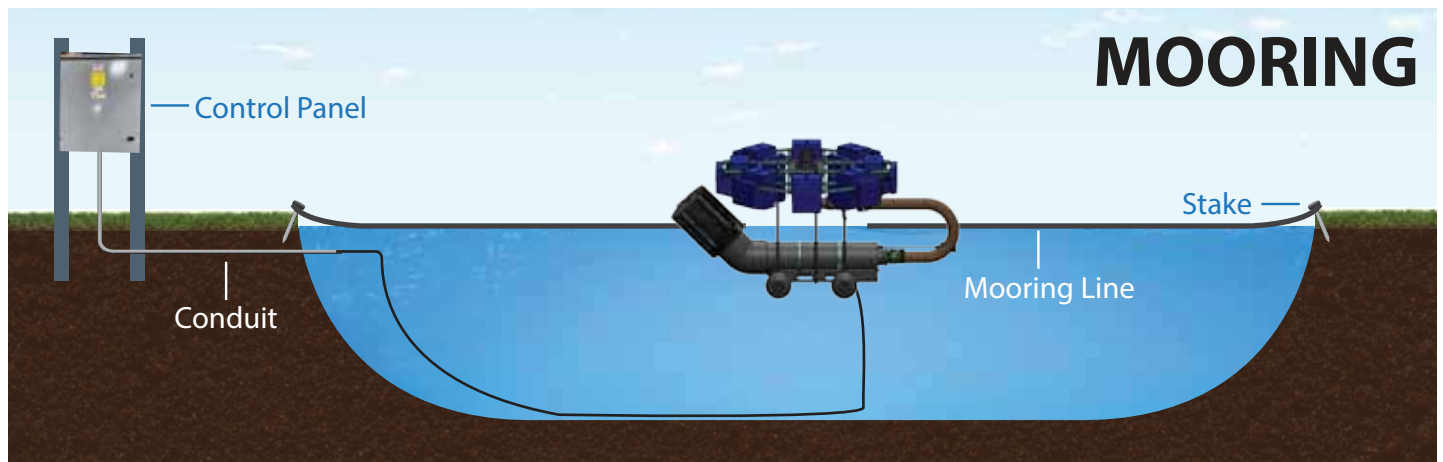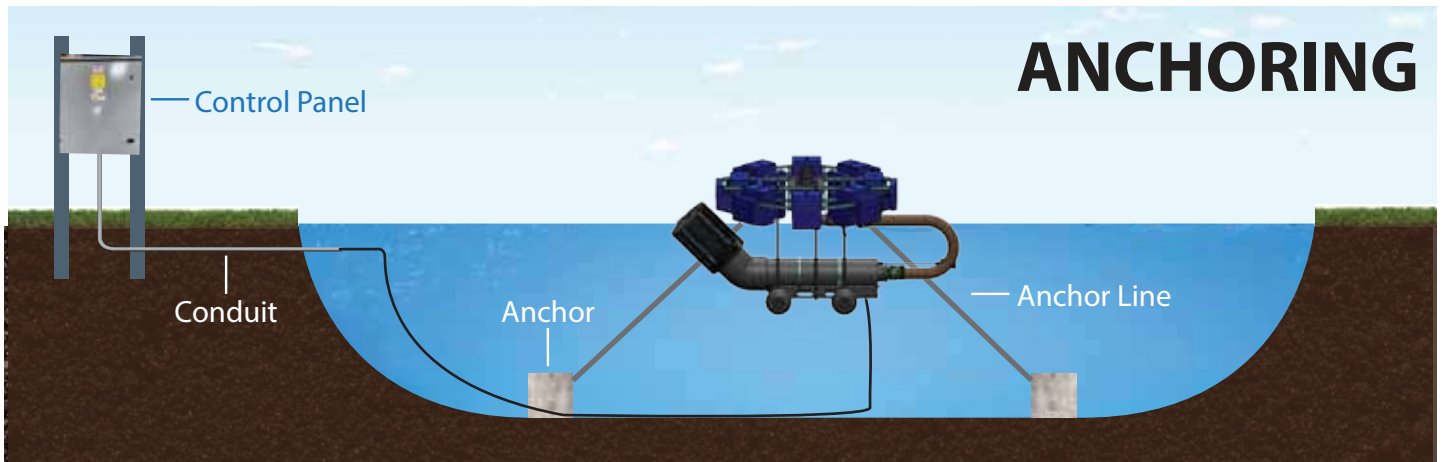

## CONTROL PANEL

### Control Panel Components

- Outdoor rated, lockable enclosure constructed of galvanized steel; powder coated gray
- Standard enclosure size 30" x 24" x 8"
- Digital timer with battery back-up
- LED lighting circuit included in all control panels
- Custom control panels for multiple units and options are available
- Franklin sub monitor provides:  
 overcurrent protection  
 undercurrent protection
- Ground fault protection
- Soft Starter and Manual Motor Protector

