


**GALAXY SELECT® SERIES**  
**ARIES**



HORSEPOWER	10	15	20	25
HT x DIA ft UPPER	47	58	64	70
HT x DIA ft LOWER	30 x 60	35 x 60	37 x 60	40 x 65
ELECTRICAL RATING Ph   VOLTAGE   AMPS	1   220-240   58A 3   220-240   34A 3   440-480   17A	3   220-240   44A 3   440-480   22A	3   220-240   54A 3   440-480   27A	3   220-240   64A 3   440-480   32A

**GALAXY SELECT® SERIES DESIGN**

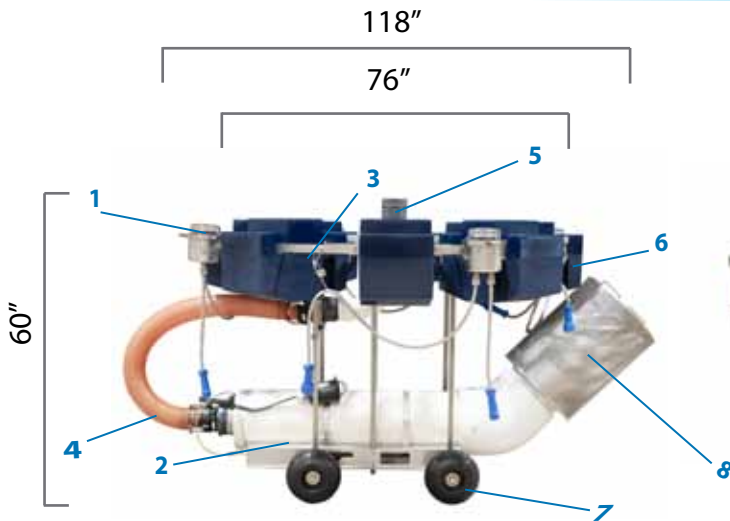

Galaxy Select® Series


- 1 - Tool Less Series 316 Stainless Steel Light Bracket
- 2 - Non-servicable, Oil Free, Water Cooled Motor with all Stainless Steel Pump Assembly
- 3 - 360° Available Tie Down Area
- 4 - Removable Discharge Tube and Intake Screen for Compact Storage
- 5 - Interchangeable Nozzles-Threaded and Tethered
- 6 - Removable Float Assembly for Easy Access to the Motor/Pump Assembly
- 7 - Easy Rolling Wheels with a Solid Axle
- 8 - Twist Locking Screen for Tool Less Removal for Cleaning with Double Handles

Minimum Operating Depth 62"


BRINGING WATER TO LIFE

**INSTALLATION**

**ANCHORING**

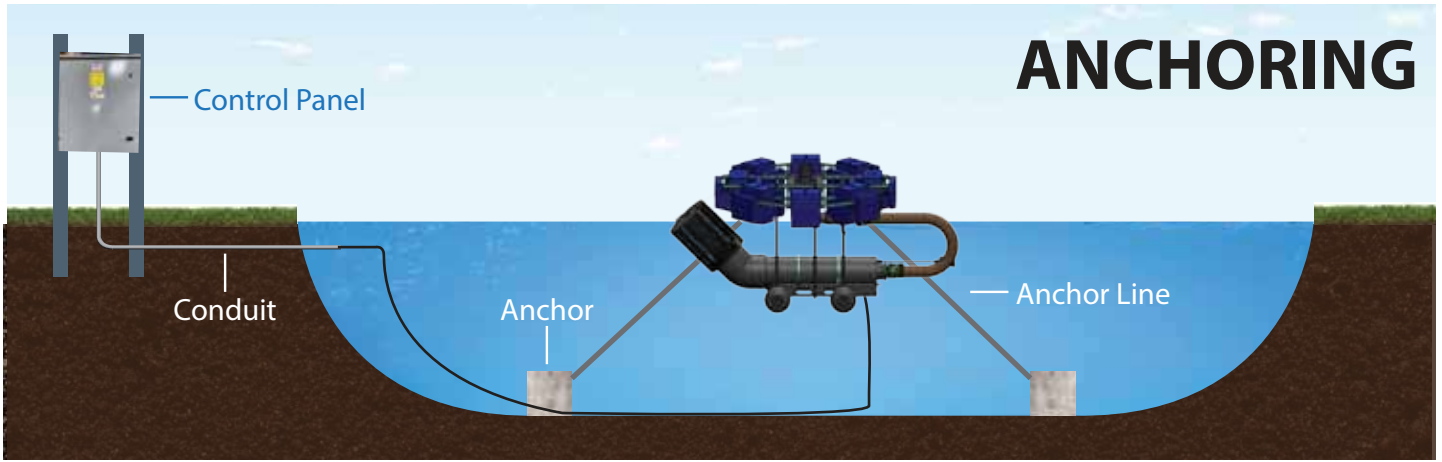

**MOORING**

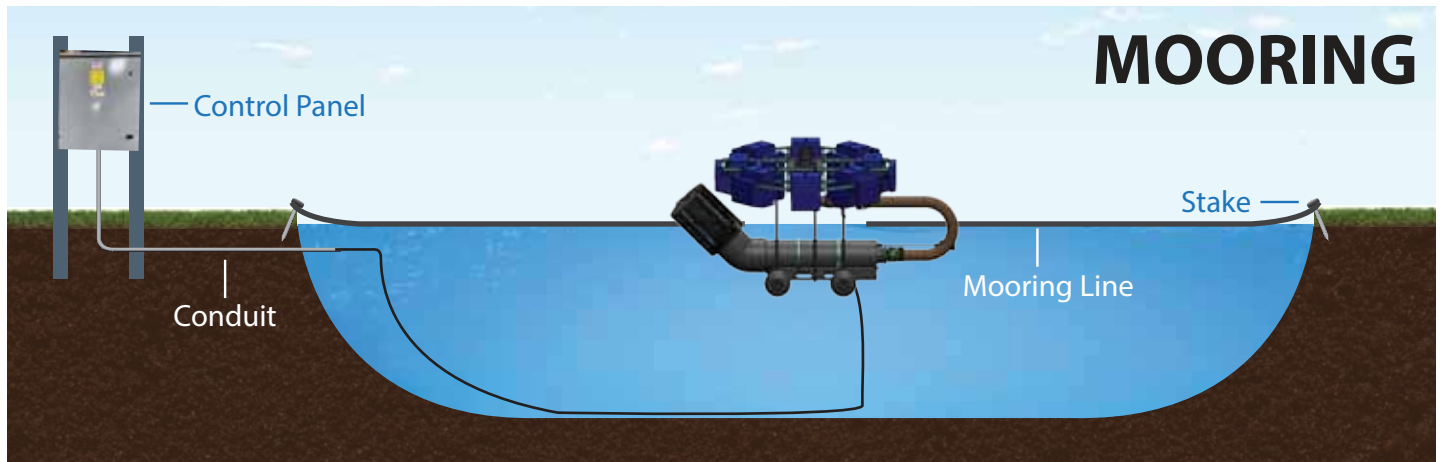

**CONTROL PANEL**

**Control Panel Components**

- Outdoor rated, lockable enclosure constructed of galvanized steel; powder coated gray
- Standard enclosure size 30" x 24" x 8"
- Digital timer with battery back-up
- LED lighting circuit included in all control panels
- Custom control panels for multiple units and options are available
- Franklin sub monitor provides:  
 overcurrent protection  
 undercurrent protection
- Ground fault protection
- Soft Starter and Manual Motor Protector

