

## MASTERS SERIES®

### PAR


## BASIC FLOW PATTERN (BFP)

VERTICAL ONLY



| HORSEPOWER                               | 1                 | 2                  | 3 & 3½                    | 5                  |
|------------------------------------------|-------------------|--------------------|---------------------------|--------------------|
| HT ft UPPER                              | 6                 | 8.5                | 13                        | 15                 |
| HT x DIA ft LOWER                        | 3 x 20            | 3.5 x 24           | 5 x 30                    | 7 x 40             |
| ELECTRICAL RATING<br>Ph   VOLTAGE   AMPS | 1   120   19      | 1   208-240   12.6 | 1 (3½HP)   208-240   15.2 | 1   208-240   27.1 |
|                                          | 1   208-240   9.6 | 3   208-240   6.3  | 3 (3HP)   208-240   10.1  | 3   208-240   18   |
|                                          | 3   208-240   5.4 | 3   440-480   3.1  | 3 (3HP)   440-480   5.1   | 3   440-480   9    |
| HT m UPPER                               | 2                 | 3.2                | 3.6                       | 4.6                |
| HT x DIA m LOWER                         | 0.9 x 7.6         | 1.8 x 9.7          | 2 x 10.3                  | 2.2 x 13.5         |
| ELECTRICAL RATING<br>Ph   VOLTAGE   AMPS | 1   220-230   8   | 1   208-230   10.5 | 1   220-230   19          | 1   208-230   24   |
|                                          | 3   380-415   2.6 | 3   380-415   3.7  | 3   380-415   5           | 3   380-415   8    |



## MASTERS SERIES® DESIGN

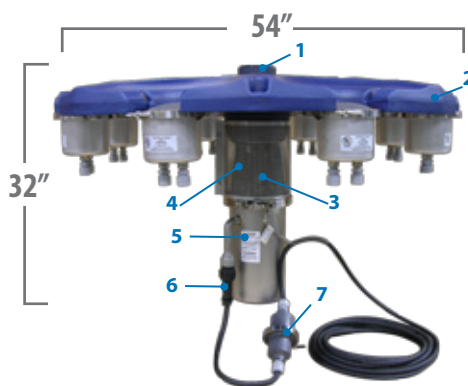

**1 - 5 HP Masters Series  
 Vertical Design**  
 (Min. Operating Depth - 3ft.)

- 1 -** Interchangeable nozzles
- 2 -** Low profile float design with recessed pockets for LED & RGBW Lighting
- 3 -** Stainless steel intake screen
- 4 -** Patented, high-efficiency molded composite impeller system
- 5 -** Exclusive custom-designed oil-cooled energy efficient motors with stainless steel motor housing and top plate
- 6 -** AquaLock Connector (ALC) electrical quick disconnect
- 7 -** Exclusive underwater cable disconnect

## INSTALLATION

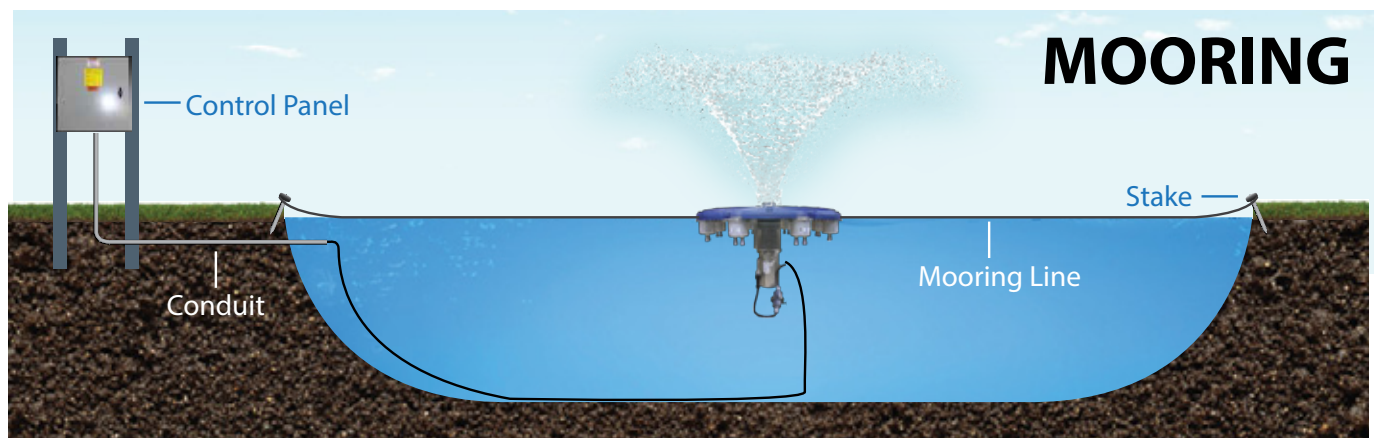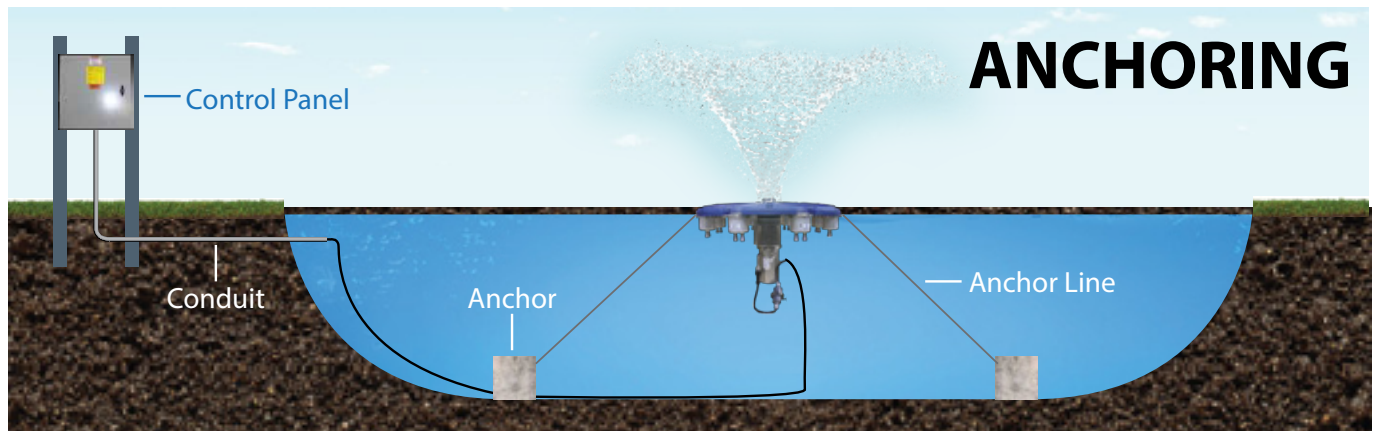

## CONTROL PANEL



### CONTROL PANEL COMPONENTS

- Outdoor rated, lockable enclosure constructed of galvanized steel powder coated gray
- Standard enclosure size 16" x 16" x 6" for 1-5HP
- Overcurrent protection
- Ground fault protection
- Motor contactor and overload
- Capacitors (single phase only)
- Digital timers with battery backup
- LED lighting circuit included in all control panels
- Custom Control Panels for multiple units and options available

