

MASTERS SERIES

RIVIERA


STRAIGHTENED FLOW PATTERN (SFP)

VERTICAL OR HORIZONTAL




HORSEPOWER	1	2	3 & 3½	5
HT ft UPPER	15	20	21	30
HT x DIA ft MIDDLE	9 x 12	11 x 12	12 x 14	18 x 16
HT x DIA ft LOWER	3 x 10	4 x 10	4 x 12	9 x 20
ELECTRICAL RATING Ph VOLTAGE AMPS	1 120 19	1 208-240 12.6	1 (3½HP) 208-240 15.2	1 208-240 27.1
	1 208-240 9.6	3 208-240 6.3	3 (3HP) 208-240 10.1	3 208-240 18
	3 208-240 5.4	3 440-480 3.1	3 (3HP) 440-480 5.1	3 440-480 9
3 440-480 2.7				
HT m UPPER	4.3	4.7	5.3	9.1
HT x DIA m MIDDLE	2.4 x 3.3	2.4 x 2.4	3.6 x 4.3	5.5 x 4.9
HT x DIA m LOWER	0.9 x 2.4	1.8 x 4.6	2 x 4.9	2.7 x 6.1
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-230 8	1 208-230 10.5	1 220-230 19	1 208-230 24
	3 380-415 2.6	3 380-415 3.7	3 380-415 5	3 380-415 8

MASTERS SERIES® DESIGN TYPES

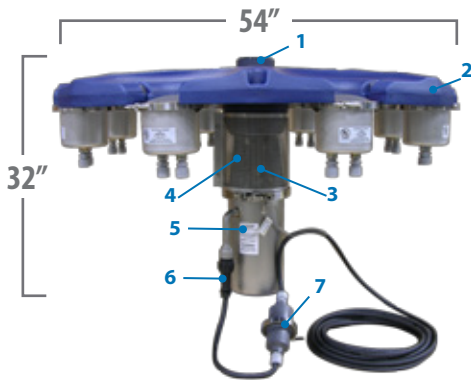

1 - 5 HP Masters Series Vertical Design
(Min. Operating Depth - 3ft.)

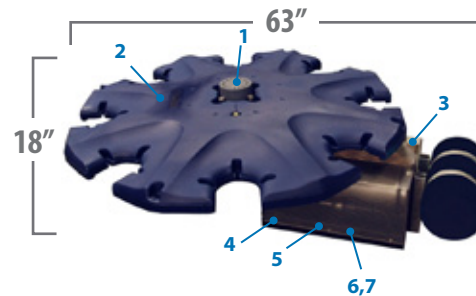



1 - 5 HP Masters Series Horizontal Design
(Min. Operating Depth - 16in.)

- 1 - Interchangeable nozzles
- 2 - Low profile float design with recessed pockets for LED & RGBW Lighting
- 3 - Stainless steel intake screen
- 4 - Patented, high-efficiency molded composite impeller system

- 5 - Exclusive custom-designed oil-cooled energy efficient motors with stainless steel motor housing and top plate
- 6 - AquaLock Connector (ALC) electrical quick disconnect
- 7 - Exclusive underwater cable disconnect

MASTERS SERIES

INSTALLATION

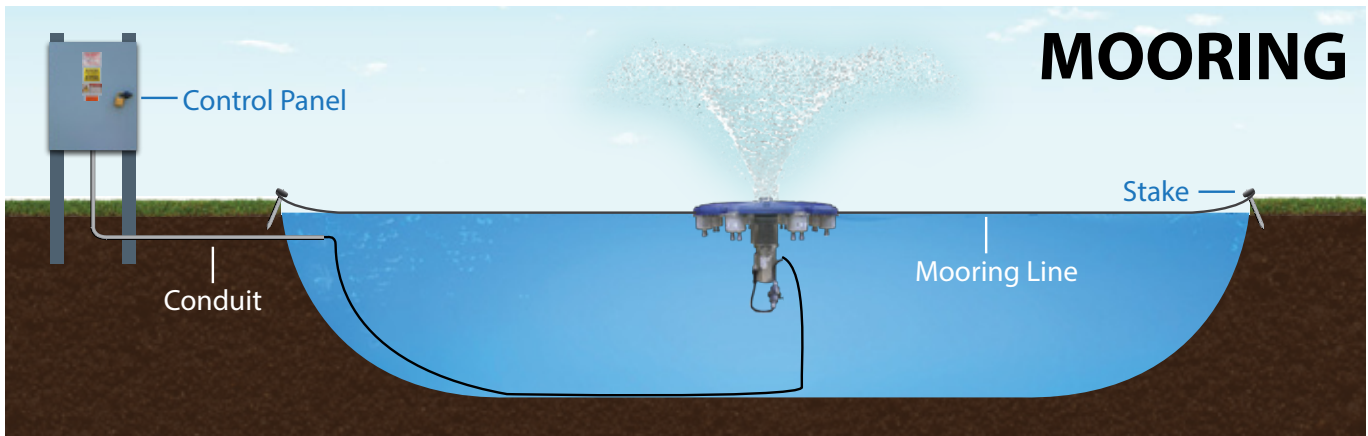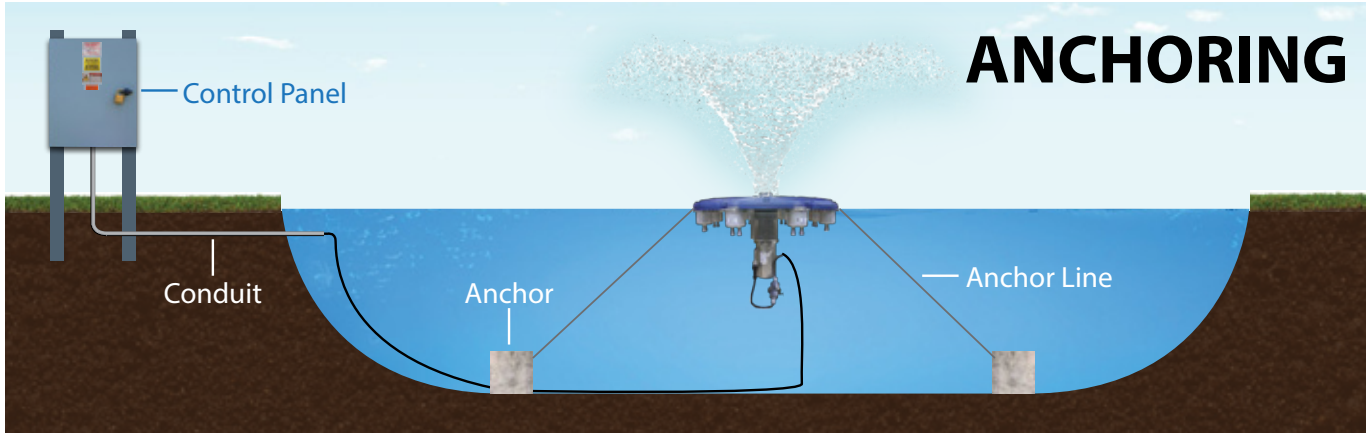

CONTROL PANEL



CONTROL PANEL COMPONENTS

- Outdoor rated, lockable enclosure constructed of galvanized steel powder coated gray
- Standard enclosure size 16" x 16" x 6" for 1-5HP and 24" x 20" x 6" for 7.5-10HP
- Overcurrent protection
- Ground fault protection
- Motor contactor and overload
- Capacitors (single phase only)
- Digital timers with battery backup
- LED lighting circuit included in all control panels
- Custom Control Panels for multiple units and options available

