



VOLCANO III SURFACE AERATOR STANDARD

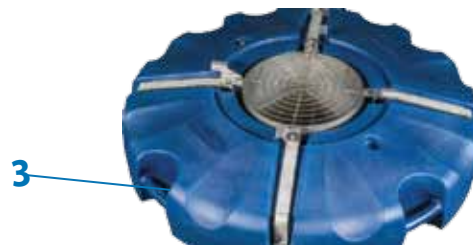

HORSEPOWER	1.5	3.5	5.5
HT x DIA ft	3 x 8.5	4 x 12	5 x 14
GPM	1324	2130	2734
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 8 3 208-240 6 3 440-480 3	1 220-240 16 3 208-240 11 3 440-480 5.5	1 220-240 26 3 208-240 16 3 440-480 8
HT x DIA m	0.9 x 3.1	1.2 x 3.7	1.4 x 4.8
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 11 3 380-415 3	3 380-415 5.5	3 380-415 8

VOLCANO III SURFACE AERATOR DESIGN

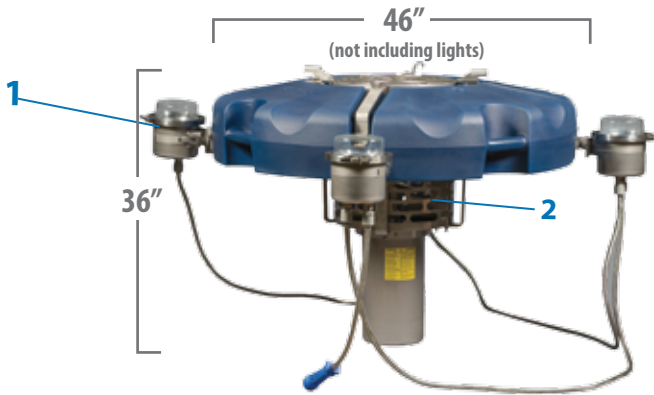

Volcano III Surface Aerator
 (Min. Operating Depth - 3ft.)

1 - Tool less light bracket



2 - High efficiency 316 stainless steel propeller system

3 - Handles on float/tie downs

4 - Removable (without tools) large capacity, rigid 16 gauge stainless steel intake screen

MASTER THE **POWER** AND **BEAUTY** OF WATER

VOLCANO III INSTALLATION

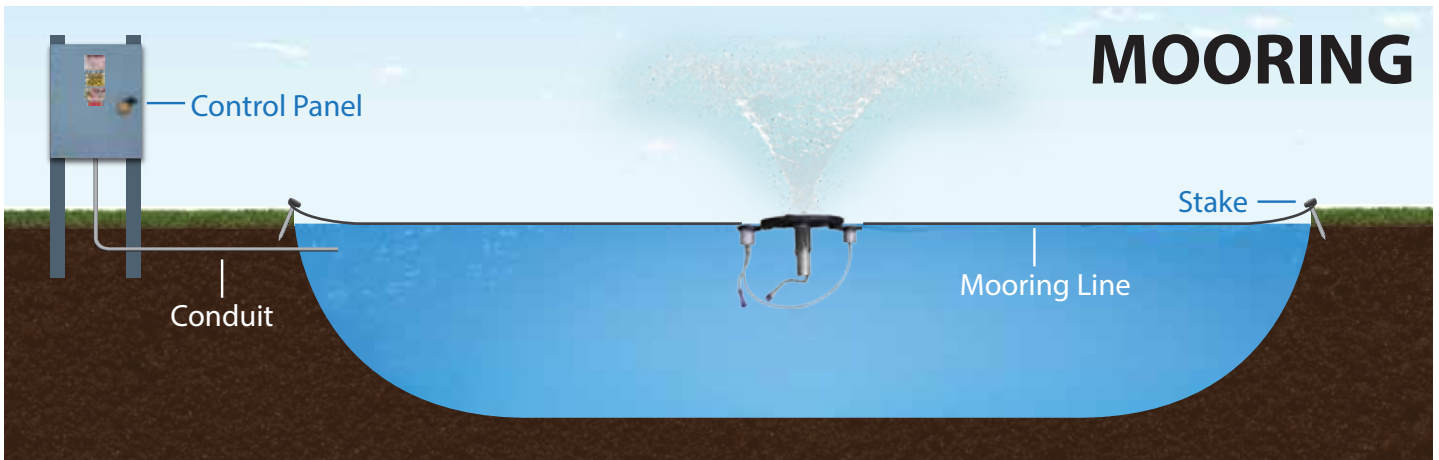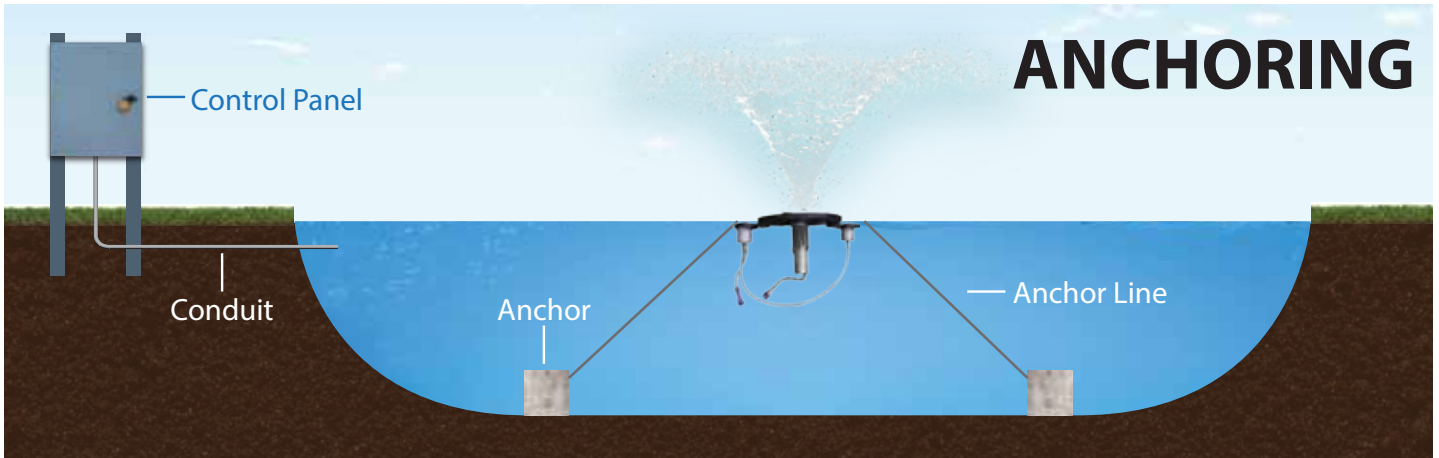

VOLCANO III CONTROL PANEL



CONTROL PANEL COMPONENTS

- Outdoor rated, lockable enclosure constructed of galvanized steel powder coated gray
- Standard enclosure size 16" x 16" x 6" for 1-5HP and 24" x 20" x 6" for 7.5-10HP
- Overcurrent protection
- Ground fault protection
- Motor contactor and overload
- Capacitors (single phase only)
- Digital timers with battery backup
- LED lighting circuit included in all control panels
- Custom Control Panels for multiple units and options available

