



CELESTIAL FOUNTAINS®

AQUARIUS



HORSEPOWER	10	15	20	25
HT ft UPPER	32	42	48	56
HT x DIA ft LOWER	10 x 40	14 x 44	16 x 52	18 x 58
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 60 3 220-240 36 3 440-480 18	3 220-240 46 3 440-480 23	3 220-240 58 3 440-480 29	3 220-240 72 3 440-480 36
HT m UPPER	9.8	12.8	NA	17.1
HT x DIA m LOWER	3.1 x 12.2	4.3 x 13.4	NA	5.5 x 17.7
ELECTRICAL RATING Ph VOLTAGE AMPS	3 380-415 18	3 380-415 23	NA	3 380-415 38

CELESTIAL FOUNTAIN® DESIGN TYPES

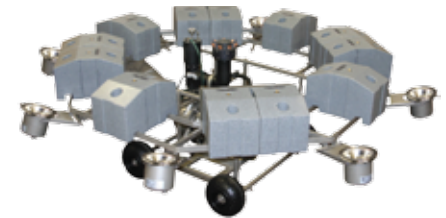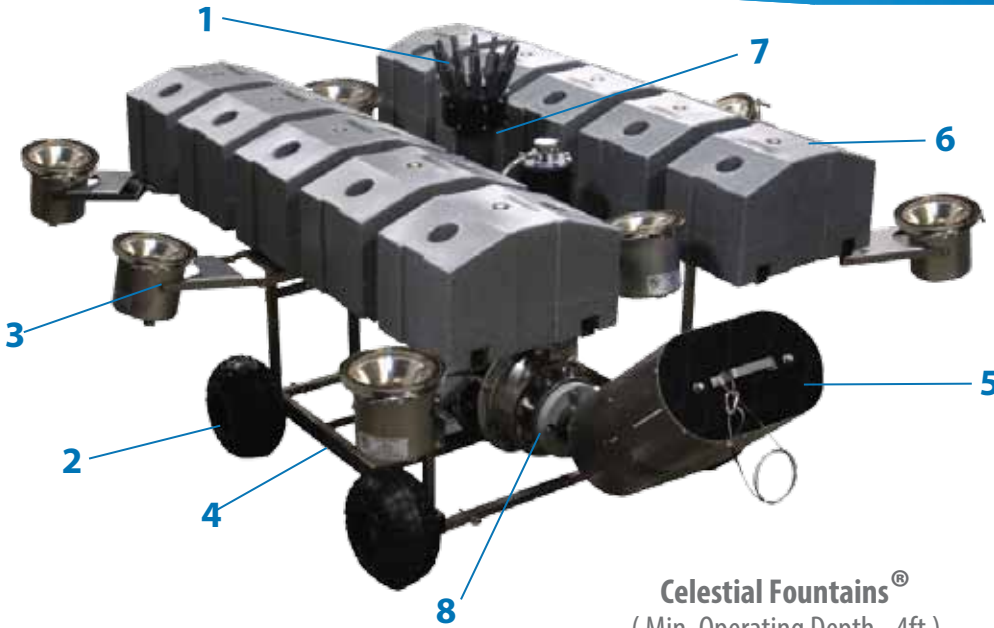



Circular design configuration for Olympian model. Optional for other models

Celestial Fountains®
(Min. Operating Depth - 4ft.)

- 1 - Ten spray patterns - simple interchangeable nozzles ranging from 10 to 25 HP
- 2 - Oversized floatation for ease of launching
- 3 - Adjustable Night Glow LED or RGBW Lighting
- 4 - Heavy-duty tubular welded stainless steel frame design adds strength and longevity

- 5 - Removable (without tools) large capacity, rigid 16 gauge stainless steel intake screen
- 6 - Individual high density polyethylene floats are in-water adjustable
- 7 - Discharge Assembly
- 8 - Rugged, heavy-duty stainless steel centrifugal pump system for highest efficiency and durability

INSTALLATION

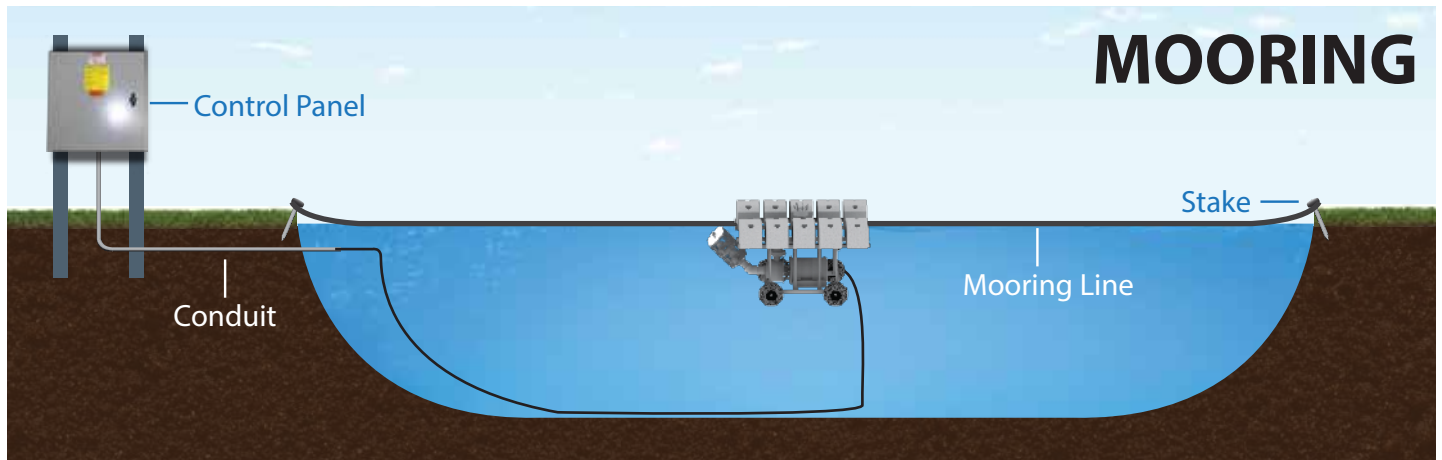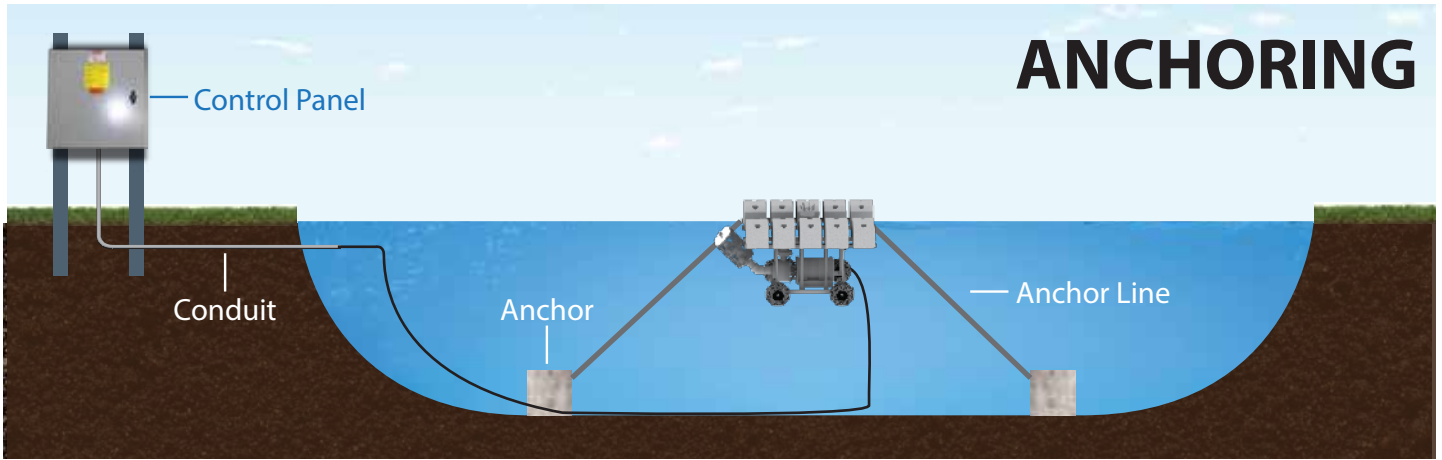

CONTROL PANEL



CONTROL PANEL COMPONENTS

- Outdoor rated, lockable enclosure constructed of galvanized steel powder coated gray
- Standard enclosure size 24" x 20" x 6" (10HP 1PH)
30" x 24" x 8" (10-25HP 3PH)
- Digital timers with battery backup
- LED lighting circuit included in all control panels
- Custom Control Panels for multiple units and options available
- Overcurrent protection
- Ground fault protection
- Motor contactor and overload-10HP 1PH
- Capacitors (single phase only)
- Soft Starter and Manual Motor Protector (10-25HP 3 PH)

