




HORSEPOWER	10	15	20	25
HT x DIA ft	26 x 10	36 x 10	42 x 10	48 x 10
ELECTRICAL RATING Ph   VOLTAGE   AMPS	1   220-240   60	3   220-240   46	3   220-240   58	3   220-240   72
	3   220-240   36	3   440-480   23	3   440-480   29	3   440-480   36
	3   440-480   18			
HT x DIA m	8 x 3	11 x 3	NA	14.6 x 3
ELECTRICAL RATING Ph   VOLTAGE   AMPS	3   380-415   18	3   380-415   23	NA	3   380-415   38

**NOTE:**  
THE LIBRA AND PISCES PATTERNS RESULT IN A MIST PRODUCING DISPLAY. AQUAMASTER® RECOMMENDS THESE PATTERNS OPERATE IN A PROTECTED OR SHELTERED AREA

## CELESTIAL FOUNTAIN® DESIGN TYPES

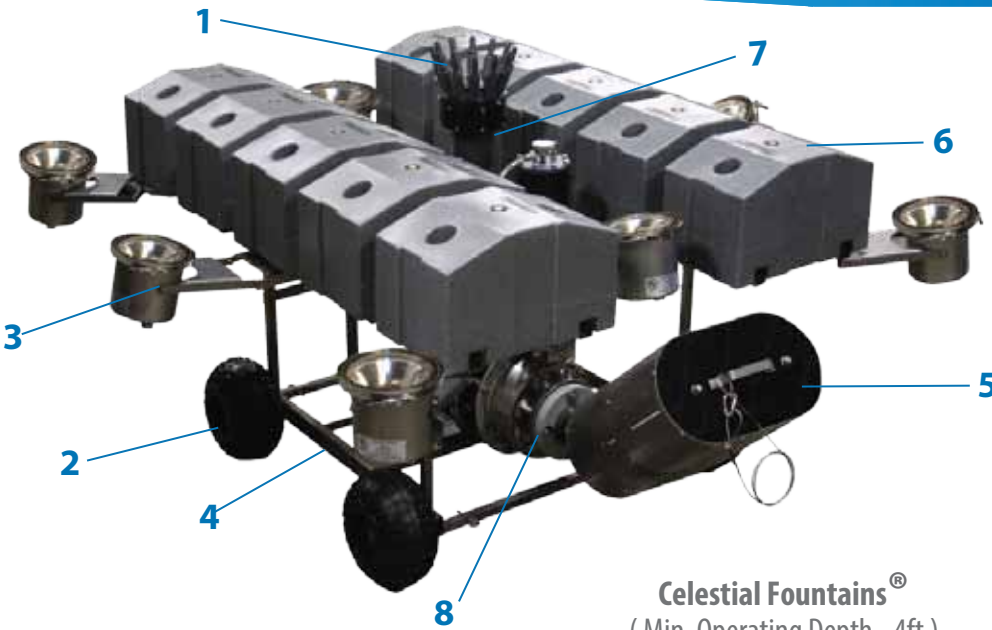


Circular design configuration for Olympian model. Optional for other models

**Celestial Fountains®**  
(Min. Operating Depth - 4ft.)


- 1 - Ten spray patterns - simple interchangeable nozzles ranging from 10 to 25 HP
- 2 - Oversized floatation for ease of launching
- 3 - Adjustable Night Glow LED or RGBW Lighting
- 4 - Heavy-duty tubular welded stainless steel frame design adds strength and longevity

- 5 - Removable (without tools) large capacity, rigid 16 gauge stainless steel intake screen
- 6 - Individual high density polyethylene floats are in-water adjustable
- 7 - Discharge Assembly
- 8 - Rugged, heavy-duty stainless steel centrifugal pump system for highest efficiency and durability

**INSTALLATION**

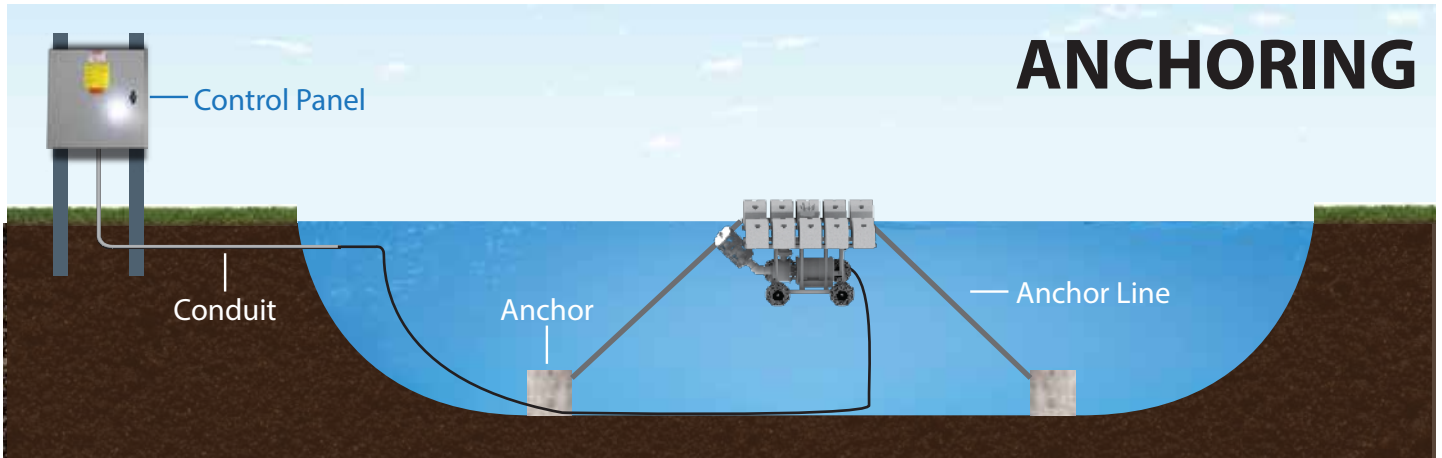

**ANCHORING**

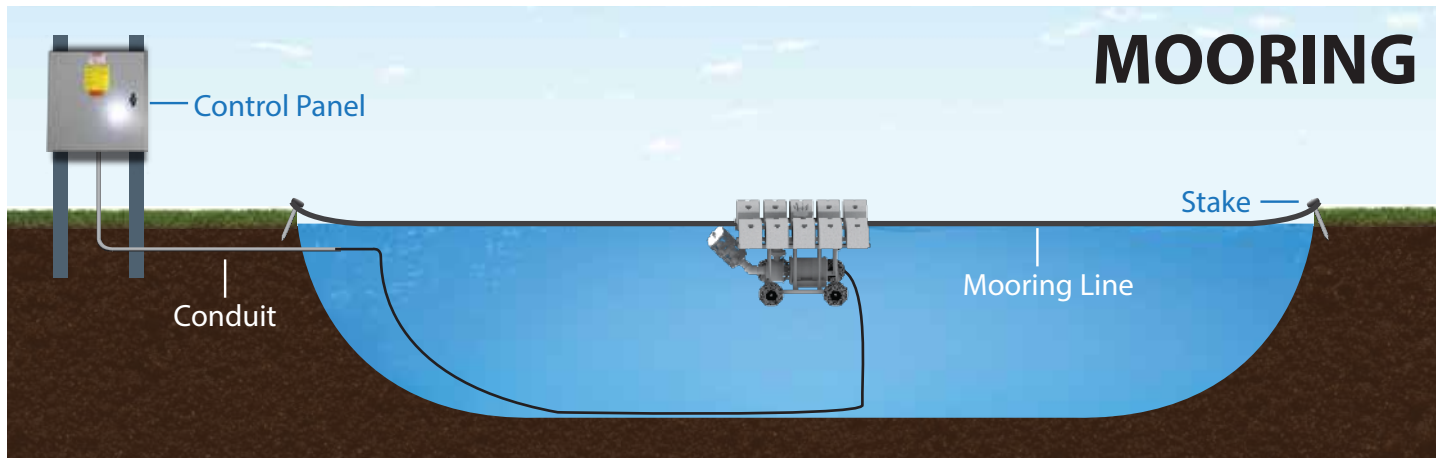

**MOORING**

**CONTROL PANEL**



**CONTROL PANEL COMPONENTS**

- Outdoor rated, lockable enclosure constructed of galvanized steel powder coated gray
- Standard enclosure size 24" x 20" x 6" (10HP 1PH)  
30" x 24" x 8" (10-25HP 3PH)
- Digital timers with battery backup
- LED lighting circuit included in all control panels
- Custom Control Panels for multiple units and options available
- Overcurrent protection
- Ground fault protection
- Motor contactor and overload-10HP 1PH
- Capacitors (single phase only)
- Soft Starter and Manual Motor Protector (10-25HP 3 PH)

