



CELESTIAL FOUNTAINS®

TAURUS



HORSEPOWER	10	15	20	25
HT x DIA ft UPPER	30	40	50	55
HT x DIA ft MIDDLE	20 x 40	25 x 40	25 x 45	25 x 50
HT x DIA ft LOWER	10 x 45	10 x 50	12 x 60	15 x 70
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 60	3 220-240 46 3 440-480 23	3 220-240 58 3 440-480 29	3 220-240 72 3 440-480 36
	3 220-240 36			
	3 440-480 18			
HT x DIA ft UPPER	9.2	12.2	N/A	16.8
HT x DIA ft MIDDLE	6.1 x 12.2	7.6 x 12.2	N/A	7.6 x 15.2
HT x DIA ft LOWER	3.1 x 13.8	3.1 x 15.2	N/A	4.6 x 21.3
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 60	3 208-240 46 3 440-480 23	N/A	3 208-240 72 3 440-480 36
	3 208-240 36			
	3 440-480 18			

CELESTIAL FOUNTAIN® DESIGN TYPES

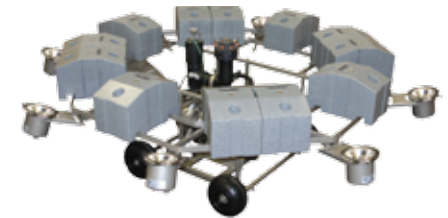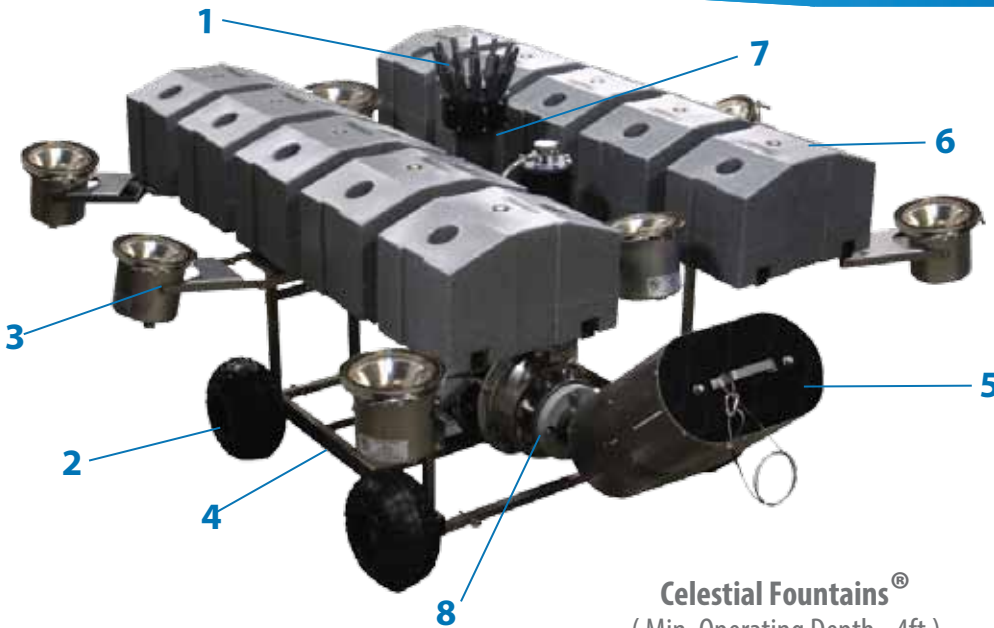



Circular design configuration for Olympian model. Optional for other models

Celestial Fountains®
(Min. Operating Depth - 4ft.)

- 1 - Ten spray patterns - simple interchangeable nozzles ranging from 10 to 25 HP
- 2 - Oversized floatation for ease of launching
- 3 - Adjustable Night Glow LED or RGBW Lighting
- 4 - Heavy-duty tubular welded stainless steel frame design adds strength and longevity

- 5 - Removable (without tools) large capacity, rigid 16 gauge stainless steel intake screen
- 6 - Individual high density polyethylene floats are in-water adjustable
- 7 - Discharge Assembly
- 8 - Rugged, heavy-duty stainless steel centrifugal pump system for highest efficiency and durability

INSTALLATION

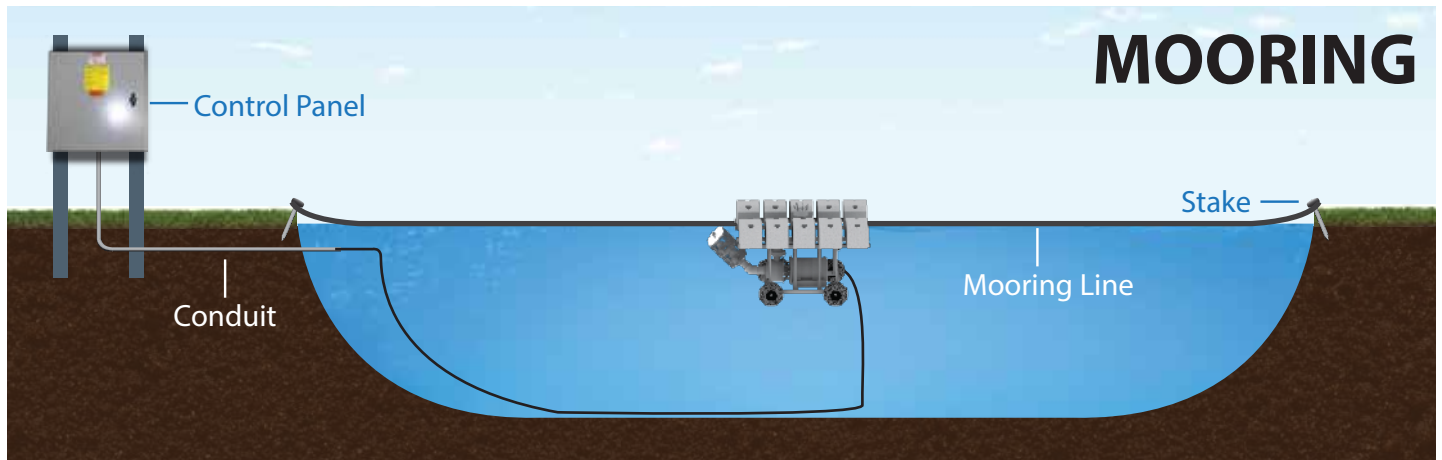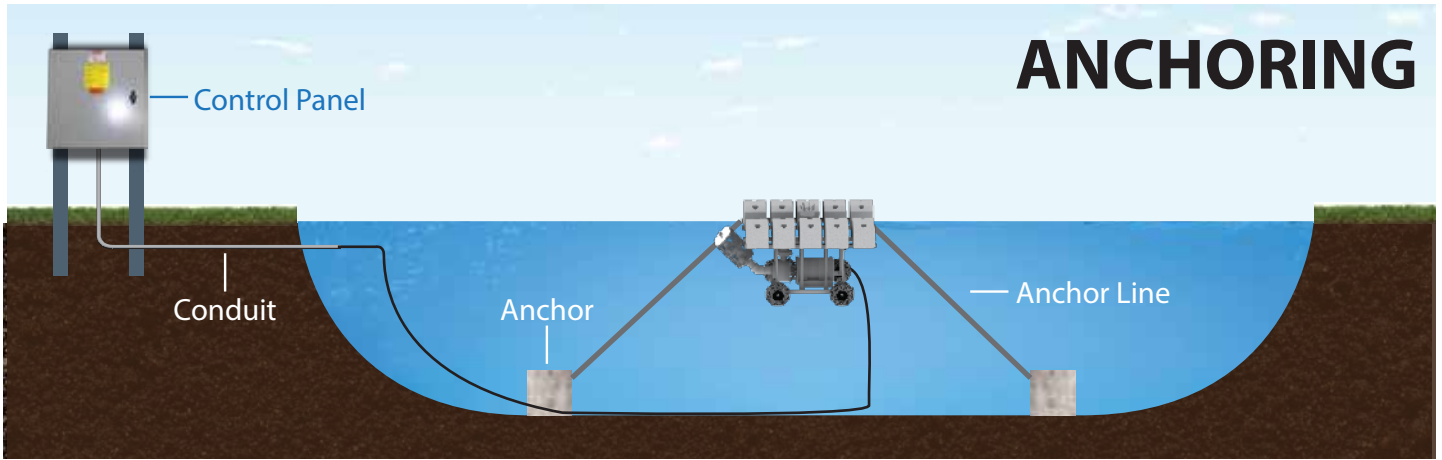

CONTROL PANEL



CONTROL PANEL COMPONENTS

- Outdoor rated, lockable enclosure constructed of galvanized steel powder coated gray
- Standard enclosure size 24" x 20" x 6" (10HP 1PH)
30" x 24" x 8" (10-25HP 3PH)
- Digital timers with battery backup
- LED lighting circuit included in all control panels
- Custom Control Panels for multiple units and options available
- Overcurrent protection
- Ground fault protection
- Motor contactor and overload-10HP 1PH
- Capacitors (single phase only)
- Soft Starter and Manual Motor Protector (10-25HP 3 PH)

