

MASTERS GRAND SERIES

VALHALLA


STRAIGHTENED FLOW PATTERN (SFP)



HORSEPOWER	7½	10
HT ft UPPER	29	N/A
HT x DIA ft MIDDLE	15.6 x 42	N/A
HT x DIA ft LOWER	10 x 65	N/A
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 42 3 220-240 26.4 3 440-480 13.2	1 220-240 60 3 220-240 36 3 440-480 18
HT x UPPER	7.8	N/A
HT x DIA m MIDDLE	3.5 x 12.2	N/A
HT x DIA m LOWER	1.9 x 18.3	N/A
ELECTRICAL RATING Ph VOLTAGE AMPS	3 380-415 12	3 380-415 18

60Hz
50Hz



MASTERS GRAND SERIES® DESIGN

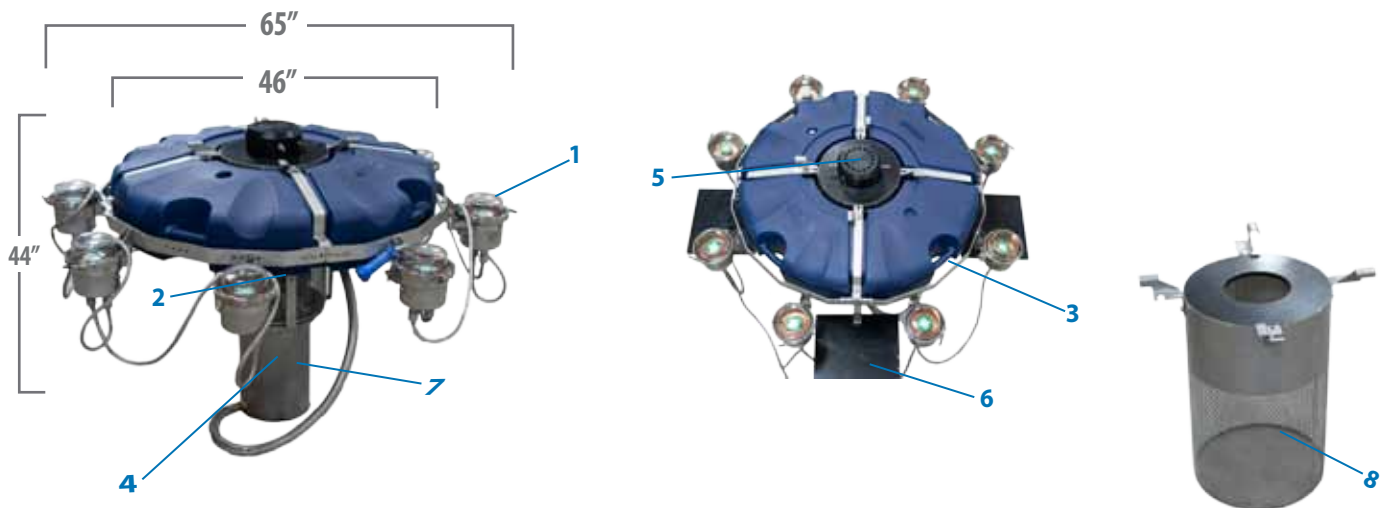

Masters Grand Series

- 1** - Tool less series 316 stainless steel light bracket
- 2** - Patented, high-efficiency series 316 stainless steel impeller system
- 3** - Handles on float/tie downs
- 4** - Exclusive custom-designed oil-cooled energy efficient motors with series 316 stainless steel motor housing, top plate and shaft
- 5** - Interchangeable twist-lock nozzles
- 6** - Optional stabilizers to help reduce fountain rocking
- 7** - Minimum operating depth 4ft
- 8** - Removable (without tools) large capacity, rigid 18 gauge series 316 stainless steel intake screen

INSTALLATION

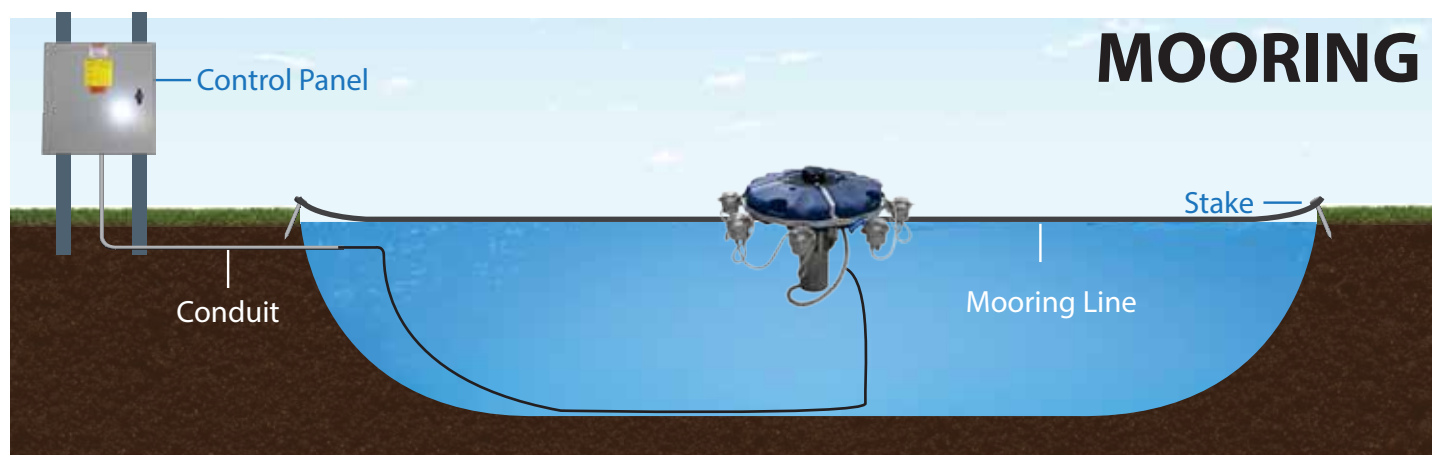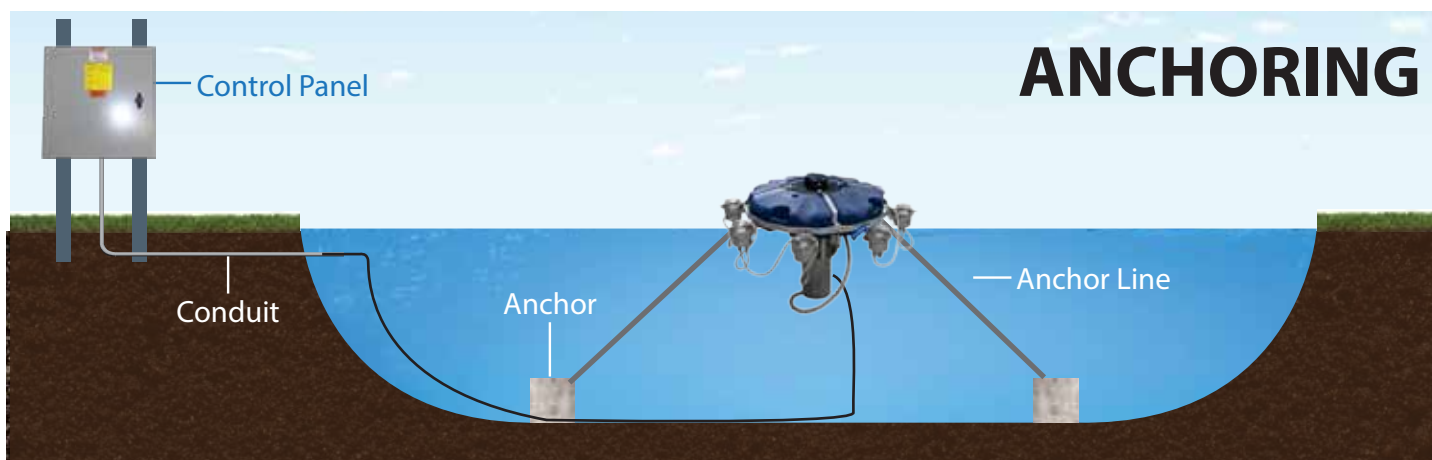

CONTROL PANEL



CONTROL PANEL COMPONENTS

- Outdoor rated, lockable enclosure constructed of galvanized steel powder coated gray
- Standard enclosure sizes:
20" x 16" x 10" (7.5HP 1PH and 3PH)
- Digital timers with battery backup
- LED lighting circuit included in all control panels
- Custom Control Panels for multiple units and options available
- Overcurrent protection
- Ground fault protection
- Motor contactor and overload-7.5HP 3PH
- Capacitors (single phase only)
- Soft Starter and Manual Motor Protector (7.5HP 3PH)

